

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 05-164158

(43)Date of publication of application : 29.06.1993

(51)Int.Cl.

F16D 65/092

F16D 69/00

(21)Application number : 03-327846

(71)Applicant : TOYOTA MOTOR CORP

(22)Date of filing : 11.12.1991


(72)Inventor : ABE KENJI  
ICHIKAWA SHIGERU

## (54) BRAKE PAD FOR DISC BRAKE

## (57)Abstract:

PURPOSE: To maintain preventing function for abnormal vibration and squeal of a disc brake.

CONSTITUTION: A third pad material 13 positioned on both sides in the rotating direction of the second pad material 12 and lower than the first pad material 11 in the pressing function against the disc rotor is constituted of a first pad material 11 having a friction pad 10b positioned in the center part of rotating direction of a disc rotor, a second pad material 12 positioned on both sides in the rotating direction of the first pad material 11 and higher than the first pad material 11 in the pressing function against the disc rotor. Moreover, slit like channel parts 14a, 14b extending while crossing the rotating direction of the disc rotor are provided between the second pad material 12 and the first pad material 11 or the third pad material 13.

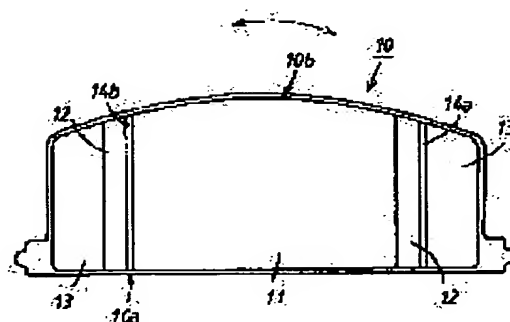

## LEGAL STATUS

[Date of request for examination] 29.10.1997

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number] 2910366

[Date of registration] 09.04.1999

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office